

# access

## LIGHTING

### IMPORTANT SAFETY INSTRUCTIONS

#### MESURES DE SECURITE A RESPECTER

Before assembling your ACCESS LIGHTING fixture, please make sure that you carefully read through this instruction sheet. Save this instruction sheet and refer to it when additions to or changes in the fixture configuration are made.

Lisez attentivement ce manuel d'instructions. Enregistrer cette feuille d'instructions et de s'y référer lorsque les ajouts ou changements dans la configuration de montage sont faites.

CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR.

CONSULTER UN ELECTRICIEN QUALIFIE POUR VOUS ASSURER QUE LES CONDUCTEURS DE LA DERIVATION SONT ADEQUATS

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.

CE PRODUIT DOIT ETRE INSTALLE SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAIT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHERENTS

**NOTE:** The important safeguards and instructions that appear in this manual are not meant to cover all possible conditions and situations that may occur. It must be understood that common sense, caution and care, are factors that can't be built into any product. These factors must be supplied by the person(s) caring for and operating the fixture.

Read all instructions

Do not install this fixture in hazardous locations.

N'installez pas cet appareil dans des emplacements dangereux.

Do not install any fixture assembly closer than 6 inches from any curtain or similar combustible material.

Laissez une distance d'au moins 6 pouces entre ce luminaire et la toute surface combustible.


"WARNING Risk of Fire and Electric Shock."

"CAUTION: Risque d' Incendie et de Choc Electriques."

### GENERAL INFORMATION

All electrical connections must be in accordance with all ordinances, Local and the U.S. National Electrical Codes (NEC). These fixtures are intended for mounting to a standard 4" metal octagon outlet box.

The box must be directly supported by the building structure and U.L. Recognized.

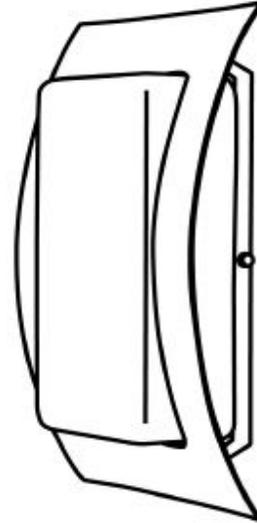

#### COLLECTION

ECLIPSE

#### APPLICATION

Wall Fixture

#### MODEL NO.

20449LEDDL

#### WHAT WE PROVIDE


- Fixture Assembly
- Crossbar
- Mounting Hardware
- Glass Diffuser
- 1 x A19 E26 LED bulb

#### WHAT YOU NEED

- Screwdriver
- Wire Cutters
- Wiring Supplies as Specified by Electrical Code

#### STEP BY STEP INSTRUCTIONS

**Before** starting your installation disconnect the Power by turning off the Circuit Breaker or by removing the fuse at the fuse box. Just turning the light off at the light switch is not sufficient to prevent electrical shock.

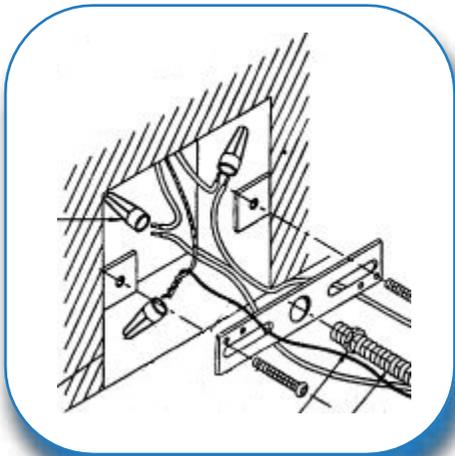


1

### PREPARE FIXTURE

If there is an existing fixture remove it.

Expose the supply wires from the J-Box.

Secure the crossbar to the J-box with the supplied screws.

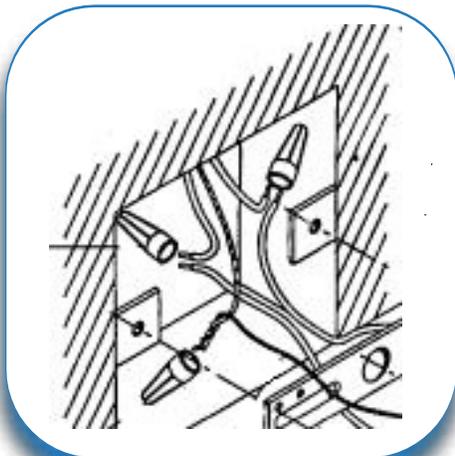

2

### CONNECT THE WIRES

Gently pull the supply wires. Connect the black

supply wire to the black fixture wire. Secure

with the supplied wire nuts. Connect the white

supply wire to the white fixture wire. Secure with

the supplied wire nuts. Attach the green J-Box


wire around green hexagonal head screw or connect

it to the green supply grounding wire of the

fixture. Secure all wires with U.L. Certified

electrical tape (not supplied). Tuck all wires

carefully into the J-Box.

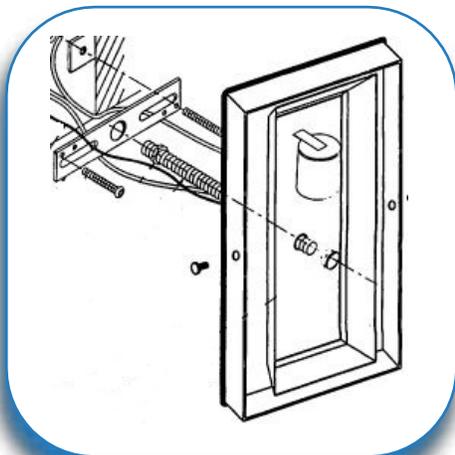

3

### MOUNT THE CANOPY


Insert the nipple into the central hole of the crossbar and

adjust to suitable length. Fasten the hex nut against the

nipple so that the nipple will not rotate further. Insert the

nipple through the central hole of the fixture and secure

against the wall with the cap nut.

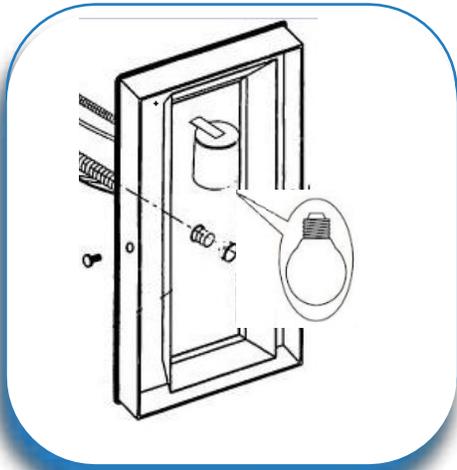


4

**INSERT THE BULB**

Insert the bulb.

DO NOT EXCEED THE RECOMMENDED WATTAGE AS STATED ON THE WARNING LABEL.

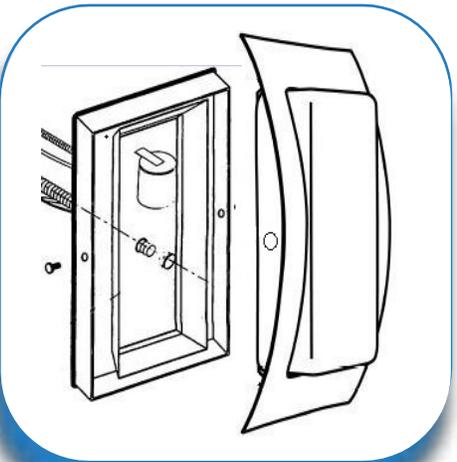


5

**SECURE THE GLASS SHADE**

Place the shade flush against the fixture. Align the holes in the shade with the holes on the side of the fixture assembly and secure with the supplied screws. The shade is fragile, so ensure that you do not damage it by over tightening the screws.

\*This fixture is wet location rated. In order to ensure that moisture does not enter the outlet box and cause a short circuit, clear caulking should be used to seal the space between the fixture mounting bracket and the wall. Ensure that a space is left at the bottom to allow the escape of moisture. It is recommended that Indoor/Outdoor Silicon Sealant be used for this purpose\*\*

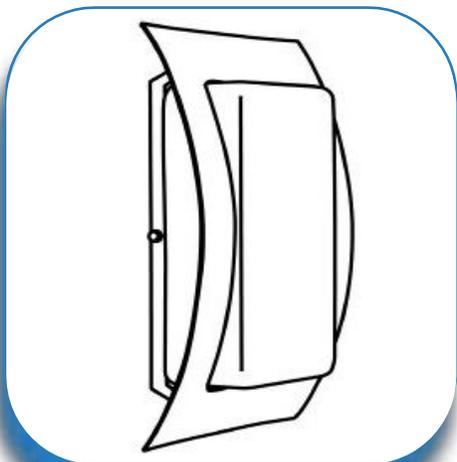

6

**RESTORE THE ELECTRICITY AND CHECK THE OPERATION OF YOUR NEW ACCESS LIGHTING FIXTURE**

**CAUTION** Please ensure that the fitting is cool and switched off before replacing the bulb. DO NOT use bulbs that might exceed the maximum wattage, stated on caution label.